


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	625-7921	ADAPTER, GEN 5/6 OIL BLOCK OFF	1
2	625-7923	BOLT, GEN 5/6 OIL ADAPTER	1
3	625-1122	O-RING	1
4	625-1235	O-RING	1
5	625-1120	O-RING	1

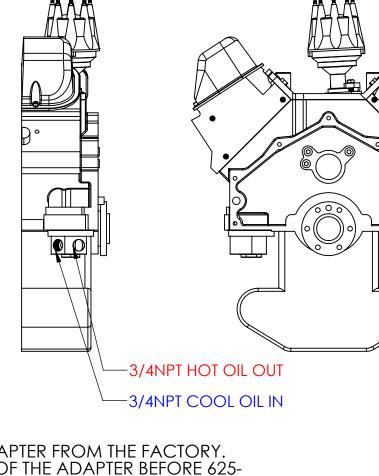

 APPET OIL TO ALL S O-KINGS.
625-1120 IS INSTALLED INSIDE THE ADAPTER FROM THE FACTORY.
INSTALL 625-1122 INTO THE BOTTOM OF THE ADAPTER BEFORE 625-7923 BOLT IS INSTALL, SEE FIG. A.
625-1235 IS INSTALLED INTO FIG. B GROOVE.
APPLY RED LOCTITE TO THE THREADS ON THE INSIDE OF BOLT 625-7923. USING 1-1/2 SOCKET TORQUE TO 50. FT. LBS...
OIL ADAPTERS COME ANODIZE BLACK, NOT AS COLORED SHOWN.

THIS DRAWING IS CONFIDENTIAL AND IS SUPPLIED ON EXPRESS CONDITION THAT IT SHALL NOT BE LENT, COPIED OR DISCLOSED TO ANY OTHER PERSON OR USED FOR ANY OTHER PURPOSE WITHOUT WRITTEN CONSENT OF HARDIN MARINE INC.. BREACH OF THIS CONTRACT WILL HOLD ....... AND IT'S PRINCIPALS LIABLE FOR LOSS AND DAMAGES.